



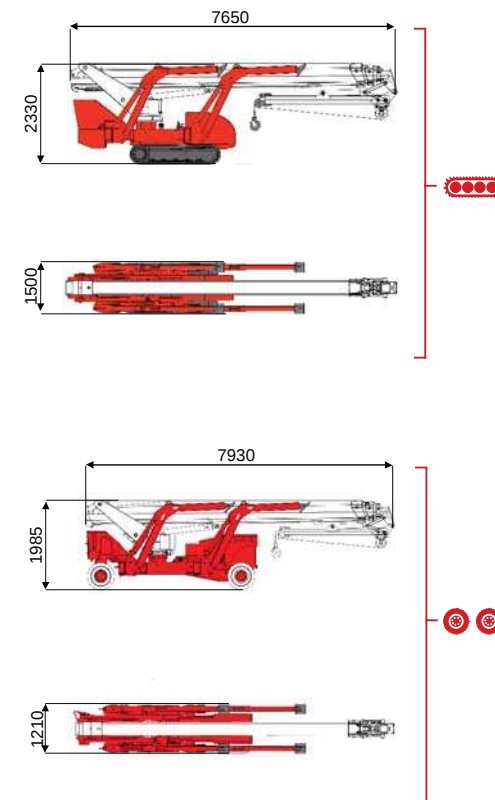

32 m ↑
9,5 m →
500 Kg ⚙

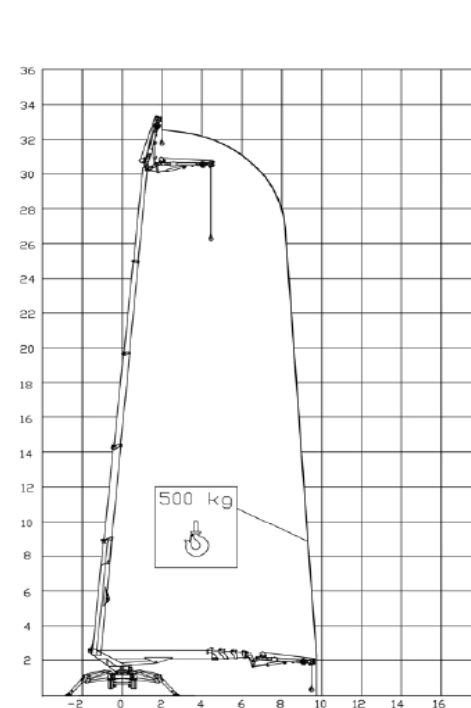

BI-ENERGY Diesel+AC																
TSJ 35/C		32 m	9,5 m	500 kg	660°	4,46 m	15%	40%	1,4 km/h	6600 kg	42 kN	4,08 kN/m ²	5,12 kN/m ²	1500 mm	7650 mm	2330 mm
TSJ 35/R		32 m	9,5 m	500 kg	660°	4,9 m	15%	25%	2 km/h	6800 kg	42 kN	4,20 kN/m ²	5,27 kN/m ²	1210 mm	7930 mm	1985 mm


							
		Battery type	Battery charge	Add. Weight	Autonomy	Charging time	Electropump
ECO	DC+AC						
		48V 270 A/h 5h	230V-48V 45A	400 kg	6-7 h endless	7h	48V 9kW

Palazzani
INDUSTRIE






Palazzani Industrie S.p.A.
Via del Pavione, 4
25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073 Fax (+39) 030657079
platforms@palazzani.it
www.palazzani.it

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

NC 439 A 16

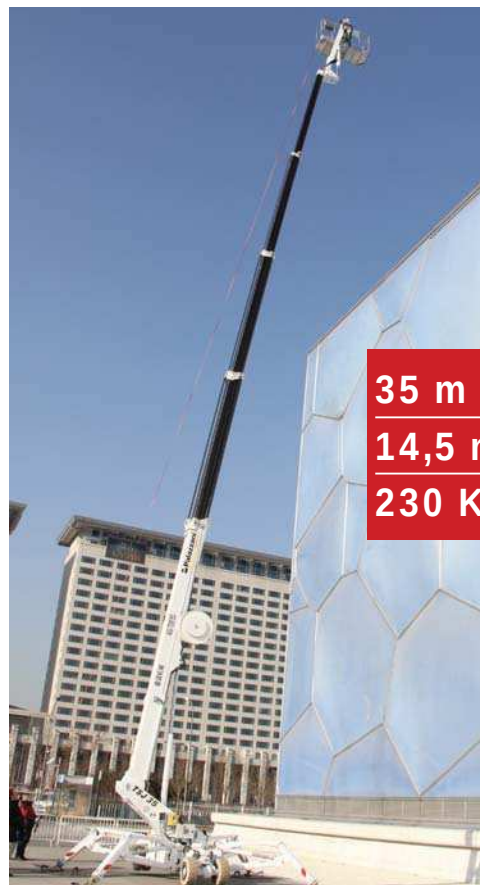

35 m ↑
14,5 m →
230 Kg 👤 👤

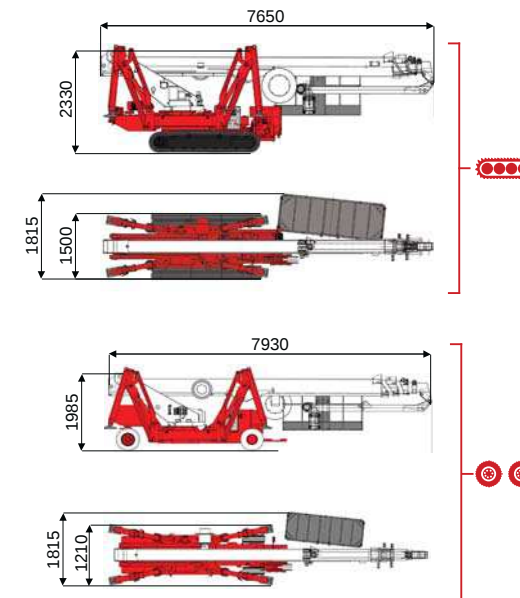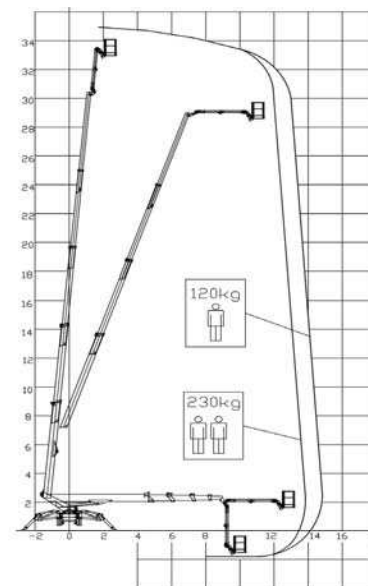

14000 mm	15000 mm	8500 mm	L1	L2	W1	W2	W3
230 kg	120 kg	120/230 kg	5025 mm	5990 mm	4250 mm	3510 mm	2770 mm

BI-ENERGY
Diesel+AC



		35 m	14,5 m	230 kg	175°	660°	180x70 cm	90°+80°	3,45-4,46 m	15%	40%	1,4 km/h	6600 kg	42 kN	4,08 kN/m²	5,12 kN/m²	1500 mm	7650 mm	2330 mm
TSJ 35/C	🔋	35 m	14,5 m	230 kg	175°	660°	180x70 cm	90°+80°	3,45-4,46 m	15%	40%	1,4 km/h	6600 kg	42 kN	4,08 kN/m²	5,12 kN/m²	1500 mm	7650 mm	2330 mm
TSJ 35/R	🔋 🔌	35 m	14,5 m	230 kg	175°	660°	180x70 cm	90°+80°	3,35-4,9 m	15%	25%	2 km/h	6800 kg	42 kN	4,20 kN/m²	5,27 kN/m²	1210 mm	7930 mm	1985 mm



Battery type



Battery charge



Add. Weight



Autonomy



Charging time

Electropump

ECO	DC+AC	🔋 🔌	48V 270 A/h 5h	230V-48V 45A	400 kg	6-7 h endless	7h	48V 9 kW
-----	-------	-----	----------------	--------------	--------	---------------	----	----------

Palazzani
INDUSTRIE

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

Palazzani Industrie S.p.A.
Via del Pavione, 4
25050 - Paderno F.C. (BS) - Italy
Tel. (+39) 0306857073 Fax (+39) 030657079
platforms@palazzani.it
www.palazzani.it

NC 438 A 16