




Hydraulic Power Systems

[PRODUCTS](#)[HYDRAULICS](#)[DEALERS](#)[CASES](#)[COMPANY](#)[MEDIA](#)

PRODUCTS

[Powerpacks](#)[Breakers](#)[HH10RV](#)[HH15](#)[HH20](#)[HH20RV](#)[▶ HH23](#)[HH25](#)[HH27](#)[Core Drills](#)[Cut-Off Saws](#)[Earth Drill](#)[Oil Flow Divider](#)[Rock Drill](#)[Post Driver](#)[Ring Saw](#)[Submersible Pumps](#)

HH23

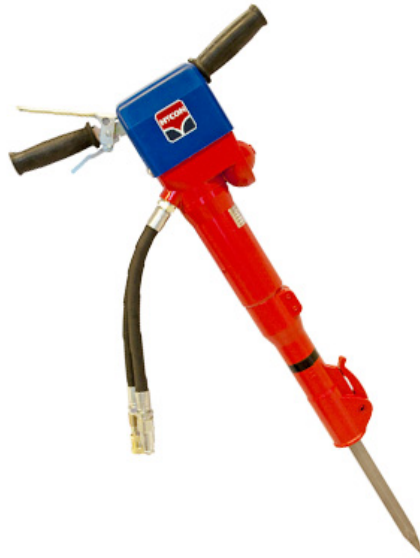

HYCON HH23 is a compact and sturdy breaker with 40% higher performance than HH20. It is designed for tough jobs in strong concrete, asphalt, ramming, etc. Comes standard with the HYCON PROLINE vibration-reduced handle, which efficiently ensures high operator comfort. HH23 is available both as 20 and 30 l.p.m. models.

HH23 is especially used by contractors, armies, asphalt companies, municipalities etc. and is very suitable for the rental business. Standard tool size is hex 25x108 mm. The breaker can be connected to the HPP-series and other hydraulic power sources. Other tool sizes on request.

Technical Data

Weight, kg	23.4 / 23.5
Oil flow, l.p.m.	20/30
Working pressure, bar	120
Max. pressure, bar	160
Blow frequency, 1/min.	1380
Noise level 1 m L _{PA} dB	96
Noise level L _{WA} dB	108
Vibration level (3 axis) m/s ²	8.0
Tool size, mm hex	25x108

[Download The HH23 breaker in use](#)[Download Which breaker for which job](#)[Download Which powerpack for which breaker](#)

CONTACT

HYCON A/S
Juelstrupparken 11
9530 Støvring
Denmark

Tel +45 96 47 52 00
Fax +45 96 47 52 01
Email : hycon@hycon.dk

HYCON on [YouTube](#)

Quick Guide

HYCON
Products
Dealers
Cases
Media
Hydraulics

Products

Powerpacks
Breakers
Core Drills
Cut-Off Saws
Pumps

Products

Post Driver
Earth Drill
Flow Divider
Rock Drill

Hydraulics

HYCON hydraulic power
Low cost demolition
Hydraulic power systems
Handheld tools
Construction and demolition tools
Low vibration breaker

